


SUPPORT

Universal and nail batten support

Galvanised steel profile in pre-bored version or with nail pass through

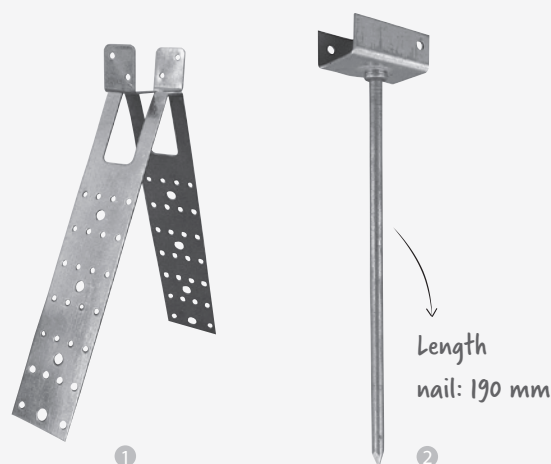



TWO VERSIONS

With pre-drilled wings for fixing on slopes or with nails for fixing on the under-ridge




ADJUSTABLE


Both types allow placement to be adjusted based on package height

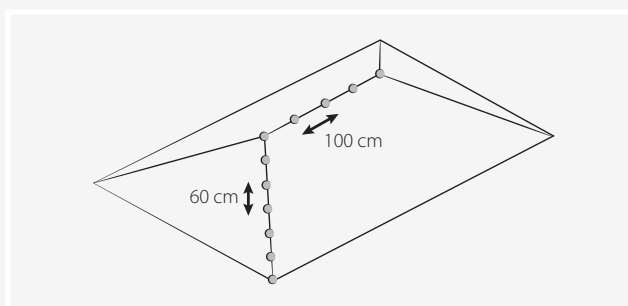


Place the batten supports every 60 cm along the ridges and every 100 cm on the under-ridge

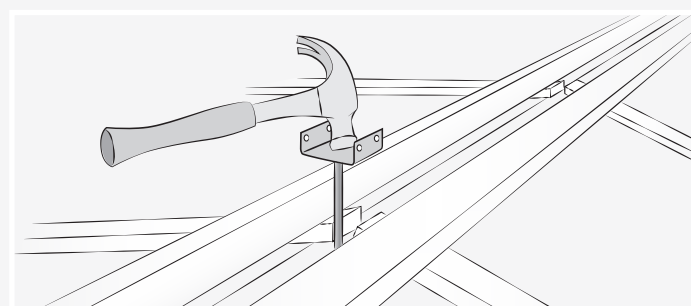

NAIL BATTEN SUPPORT: hammer until the desired depth is reached

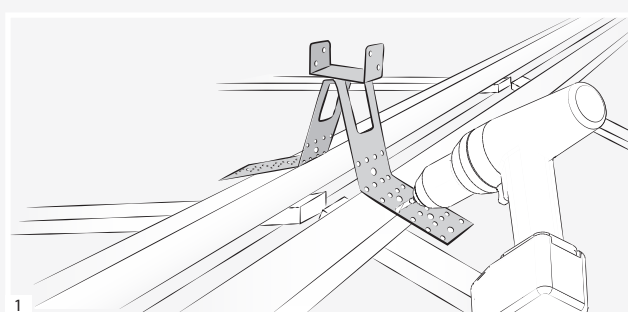

UNIVERSAL BATTEN SUPPORT: place the product using screws or nails along the under-ridge beams to it can be adjusted

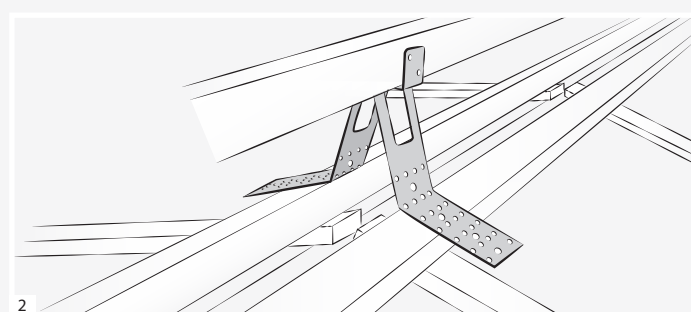

Attach to wood batten to the batten support


CODES AND DIMENSIONS

	code	ex code	L _{batten} [mm]	L [mm]	version	pcs/box
1	SUPPORTUNI	D71501	50	210	universal	50
2	SUPPORTNAIL	D71504	50	210	nail	50

ALU RAPID


Adhesive wall and chimney fitting

Butyl glue covered in preprinted pleated aluminium

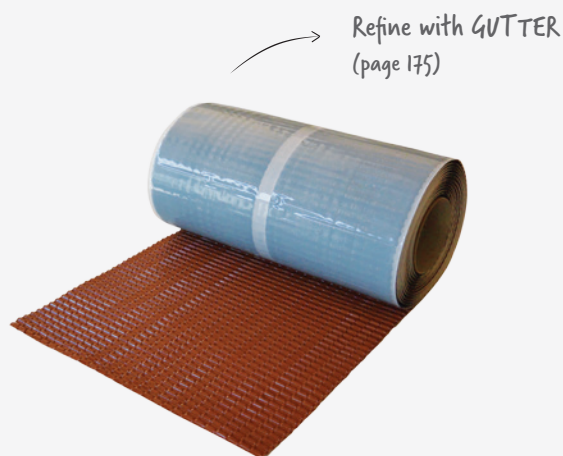


ADJUSTABLE

The double pleating is the answer for the need for mouldability during installation




BUTYL


The special 1.3 mm adhesive butyl mix offers excellent adherence, even on rough surfaces

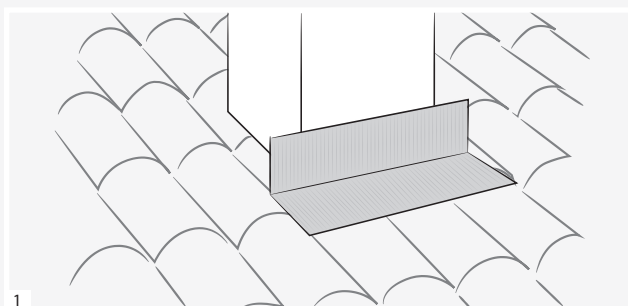


1 Cut the product, fold it on the joints of the points to be connected and press on the external sides

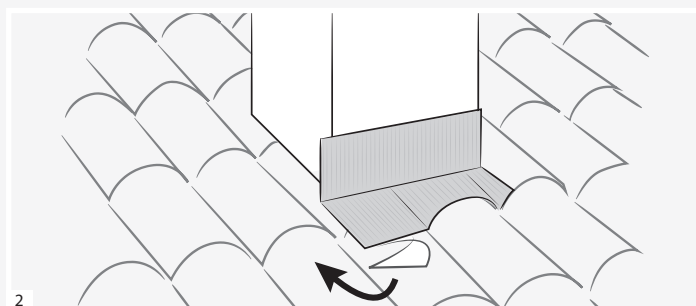

2 Remove the protective film and adjust the product to the shape of the roof, pressing down so it attaches well

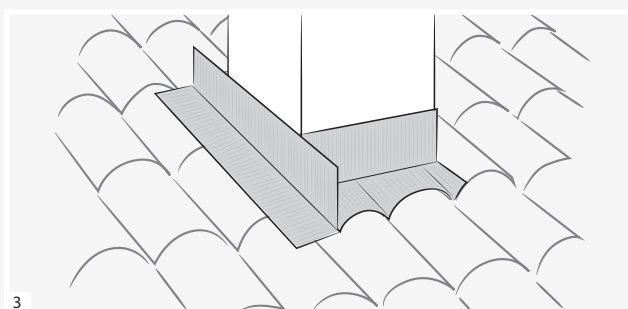

3 Cut the product for lateral strips, fold it on the joints of the points to be connected and press on the external sides

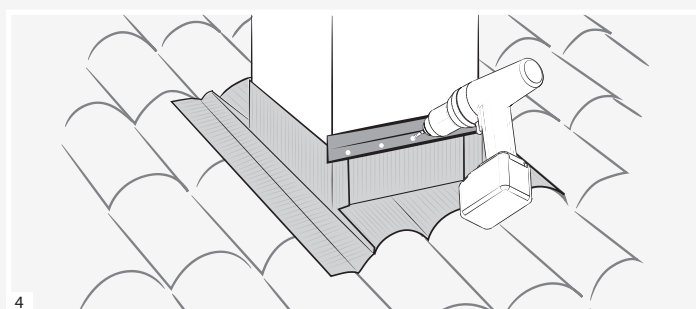

4 Refine the upper edge with the flashing GUTTER

CODES AND DIMENSIONS

code	ex code	B [mm]	L [m]	colour	pcs/box
ALURRED150	D71722	150	5	brick-red	1
ALURRED300	D71742	300	5	brick-red	1
ALURBRO300	D71744	300	5	brown	1