


ALU RAPID


Adhesive wall and chimney fitting

Butyl glue covered in preprinted pleated aluminium

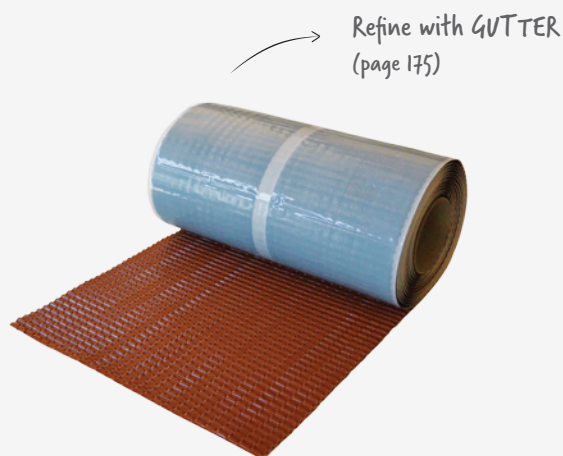


ADJUSTABLE

The double pleating is the answer for the need for mouldability during installation




BUTYL


The special 1.3 mm adhesive butyl mix offers excellent adherence, even on rough surfaces

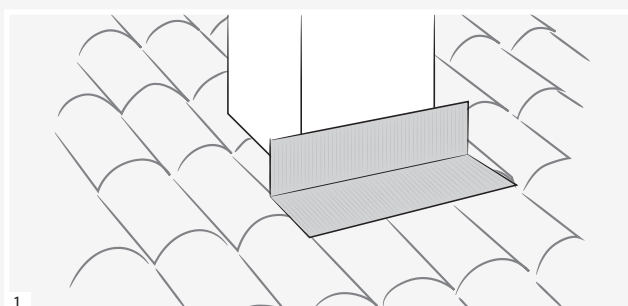


1 Cut the product, fold it on the joints of the points to be connected and press on the external sides

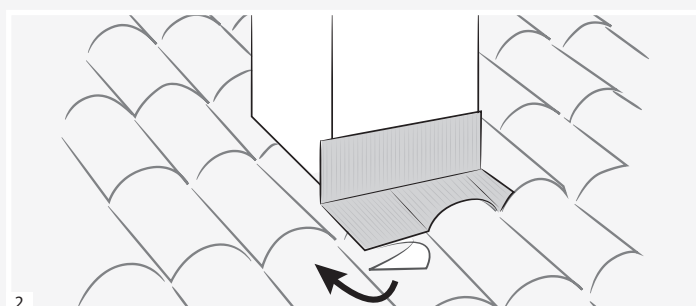

2 Remove the protective film and adjust the product to the shape of the roof, pressing down so it attaches well

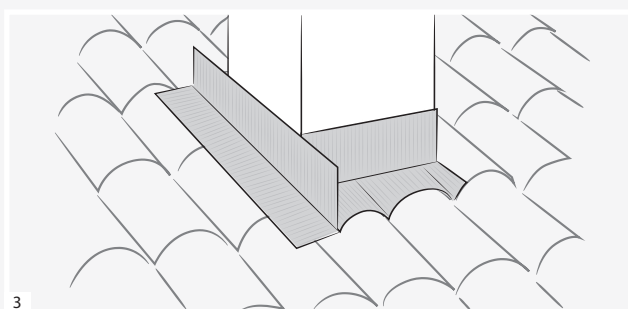

3 Cut the product for lateral strips, fold it on the joints of the points to be connected and press on the external sides

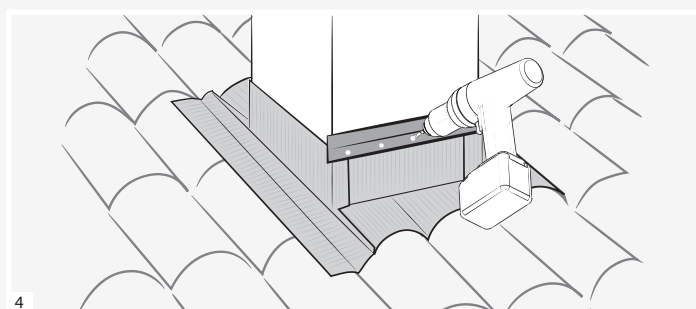

4 Refine the upper edge with the flashing GUTTER

CODES AND DIMENSIONS

code	ex code	B [mm]	L [m]	colour	pcs/box
ALURRED150	D71722	150	5	brick-red	1
ALURRED300	D71742	300	5	brick-red	1
ALURBRO300	D71744	300	5	brown	1