

THERMOWASHER


Washer to fasten insulation to wood

Propylene (PP) system





ANTI-THERMAL BRIDGE

Incorporated hole cover to avoid thermal bridges. Large cable spaces for proper plaster adhesion



SECURITY

Includes a system that impedes the unthreading of the screw; used with rothoblaas HBS screws with the CE mark

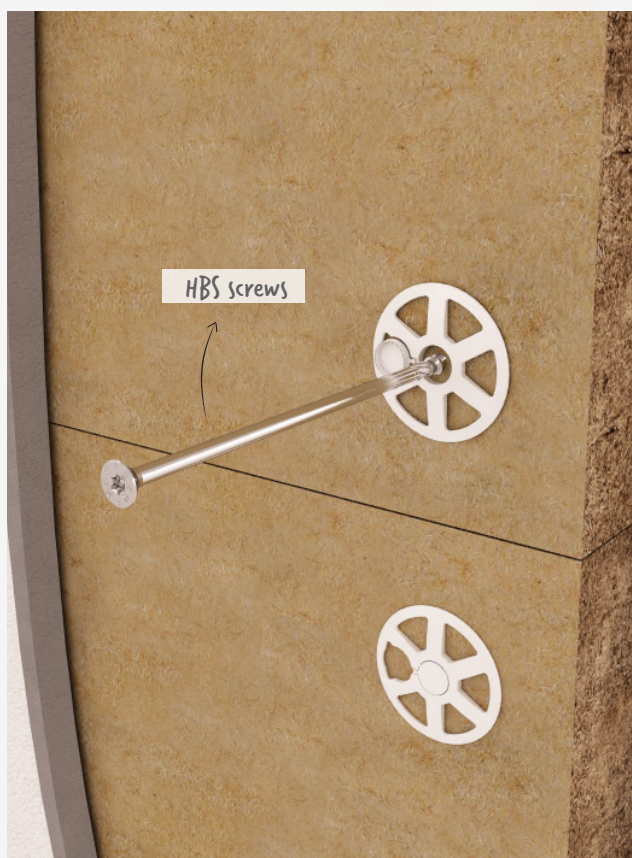

CE FASTENING WITH HBS SCREWS

The THERMOWASHER is intended for use with screws with the CE mark in accordance with ETA. Ideal for Ø6 or Ø8 HBS screws, with lengths based on the thickness of the insulation to be fastened. Recommended measures range from HBS 6x140 to HBS 8x500 mm (code **HBS6140 - HBS8500**)

UNIVERSAL FASTENING

Ideal for creating continuous connections between XLAM (Cross Laminated Timber) panels and platform frames to the reinforced concrete foundation

CODES AND DIMENSIONS

code	ex code	d _{SCREW} [mm]	a x b x c [mm]	pcs/box
THERMO65	D78202	6 and 8	65 x 4 x 20	700