

PLASTER BAND IN


COMPOSITION

- support
2-layer PP vapour control membrane
- adhesive
acrylic dispersion without solvents
- release liner
easy-release PP film



COMPOSITION

- support
2-layer PP vapour control membrane
- adhesive
acrylic dispersion without solvents
- release liner
easy-release PP film

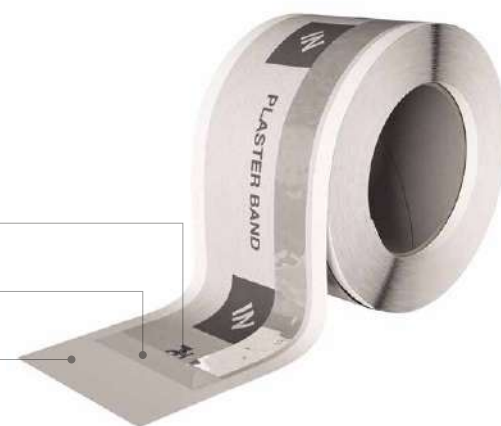

TECHNICAL DATA


Properties	standard	value	USC conversion
Total thickness	DIN 53855	0,5 mm	20 mil
Mass per unit area	EN 1848-2	300 g/m ²	113.9 oz/ft ²
Water vapour transmission (Sd)	EN 1931	> 10 m	< 0.35 US perm
Maximum tensile force MD/CD	EN 12311-1	115 / 75 N/50 mm	13.13/8.57 lbf/in
Elongation MD/CD	EN 12311-1	75 / 80%	-
Watertightness	EN 13984	W1	-
Tightness in heavy rain	EN 1027	≥ 1050 Pa	-
Air permeability	EN 1026	≤ 0,1 m ³ /(h·m·(daPa) ^{2/3}	-
UV-resistant	-	3 months	-
Reaction to fire	EN 13501-1	class E	-
Application temperature	-	> +5 °C	> +41 °F
Temperature resistance	-	-40 / +80 °C	-40 / +176 °F
Storage temperature ⁽¹⁾	-	+5 / +25 °C	+41 / +77 °F
Solvents	-	no	-
Emicode	GEV test method	EC1 plus	-

⁽¹⁾Store the product in a dry, covered location for no more than 24 months.
Waste classification (2014/955/EU): 08 04 10.

PLASTER BAND OUT


COMPOSITION

- support
breathable 2-layer PP membrane
- adhesive
acrylic dispersion without solvents
- release liner
easy-release PP film

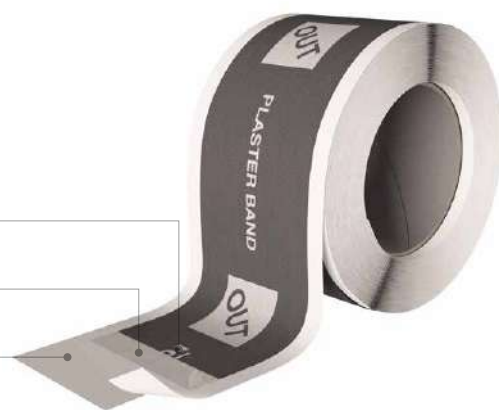

COMPOSITION

- support
breathable 2-layer PP membrane
- adhesive
acrylic dispersion without solvents
- release liner
easy-release PP film

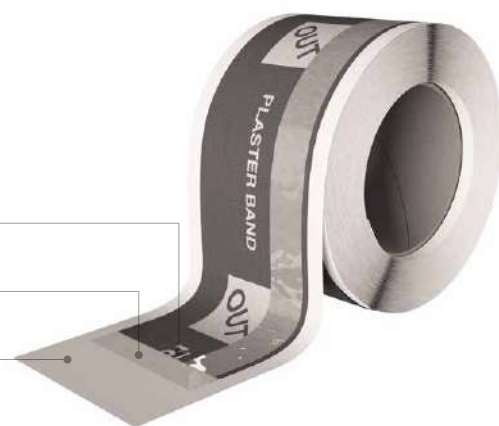


TECHNICAL DATA

Properties	standard	value	USC conversion
Total thickness	DIN 53855	0,7 mm	28 mil
Mass per unit area	EN 1848-2	360 g/m ²	-
Water vapour transmission (Sd)	EN 1931	< 1 m	> 3.5 US perm
Maximum tensile force MD/CD	EN 12311-1	290 / 190 N/50 mm	-
Elongation MD/CD	EN 12311-1	75 / 135%	-
Watertightness	EN 13984	W1	-
Tightness in heavy rain	EN 1027	≥ 1050 Pa	-
Air permeability	EN 1026	≤ 0,1 m ³ /(h·m·(daPa) ^{2/3}	-
UV-resistant	-	12 months	-
Reaction to fire	EN 13501-1	class E	-
Application temperature	-	> -10 °C	> +14 °F
Temperature resistance	-	-40 / +80 °C	-40 / +176 °F
Storage temperature ⁽¹⁾	-	+5 / +25 °C	+41 / +77 °F
Solvents	-	no	-
Emicode	GEV test method	EC1 plus	-

⁽¹⁾Store the product in a dry, covered location for no more than 24 months.
Waste classification (2014/955/EU): 08 04 10.

RECOMMENDATIONS FOR INSTALLATION | PLASTER BAND IN


APPLICATION OF THE TAPE BEFORE INSTALLATION OF THE WINDOW/DOOR FRAME

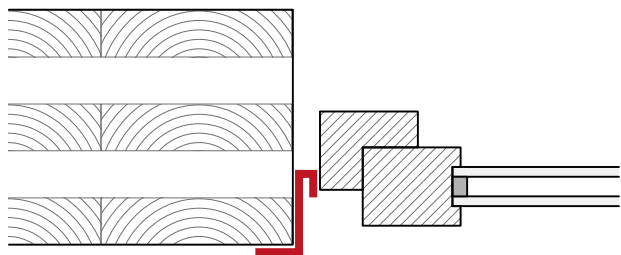

7 ROLLER


RECOMMENDATIONS FOR INSTALLATION | PLASTER BAND IN

SEALING WITH WINDOW/DOOR ALREADY INSTALLED

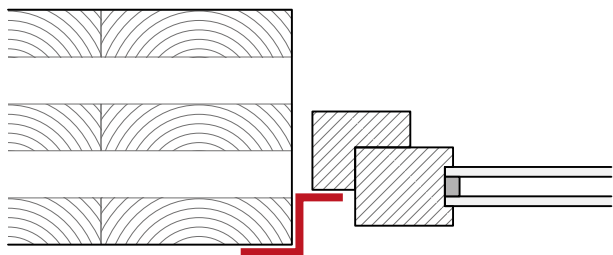

RECOMMENDATIONS FOR INSTALLATION | PLASTER BAND OUT

APPLICATION OF THE TAPE BEFORE INSTALLATION OF THE WINDOW/DOOR FRAME

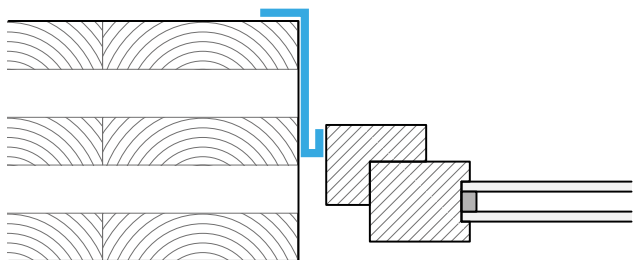

4 EXPAND BAND, WINDOW BAND, FRAME BAND

RECOMMENDATIONS FOR INSTALLATION | PLASTER BAND OUT

SEALING WITH WINDOW/DOOR ALREADY INSTALLED

