

TOWER PEAK

ADAPTOR FOR DOUBLE LAYER RIDGE PIECE FOR TOWER

INTELLIGENT

Accessory that allows for anchor line assembly even on a closed roof package, without the need for opening.

ROBUST

The TOWER PEAK adaptor makes it possible to provide safety for up to four workers.



EN
795:2012
A + C

CEN/TS
16415:2013



CODES AND DIMENSIONS

CODE	material	L [mm]	B [mm]	H [mm]	pcs.
TOWERPEAK	S235JR zinc-plated steel	350	100	30	1


Fastening screws not included in the package.

COMPLEMENTARY PRODUCTS


FASTENING

n.	TYPE	description	d ₁ [mm]	p _{min} [mm]	p.
24	HBS	screw for timber	8	80	180

INSTALLATION

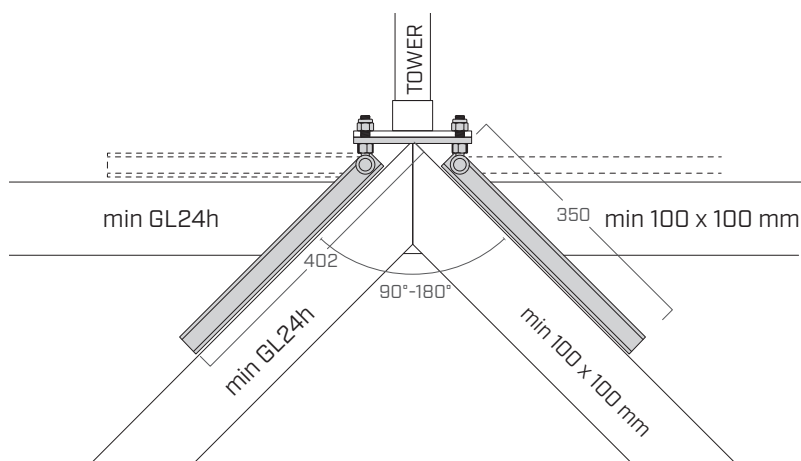

SURFACE INCLINATION

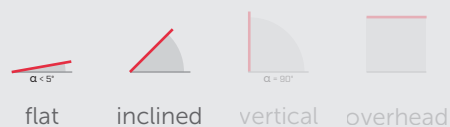

FIELD OF USE

- Min. timber structure: 100 x 100 mm