

TOWER SLOPE


FASTENING GUIDE FOR RAFTER FOR TOWER

VERSATILE

Allows the anchor system to be placed in any point on the roof.

UNIVERSAL

Due to the range of action from 50 to 100 cm, it can cover the most common spaces between beams.

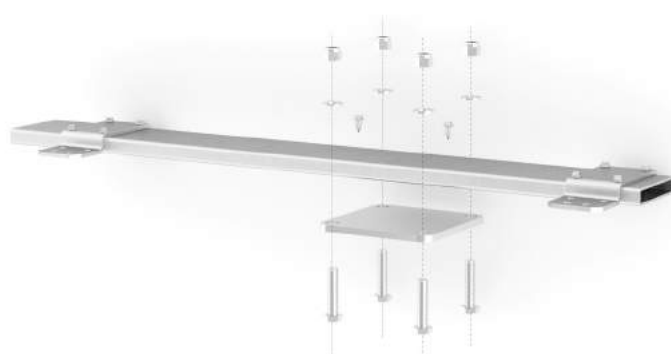

CODES AND DIMENSIONS

CODE	material	L [mm]	B [mm]	H [mm]	pcs.
TOWERSLOPE	S235JR zinc-plated steel	1200	100	20	1


Fastening screws not included in the package.

COMPLEMENTARY PRODUCTS

FASTENING

n.	TYPE	description	d ₁ [mm]	p _{min} [mm]	p.
16	HBS	screw for timber	8	80	180

INSTALLATION

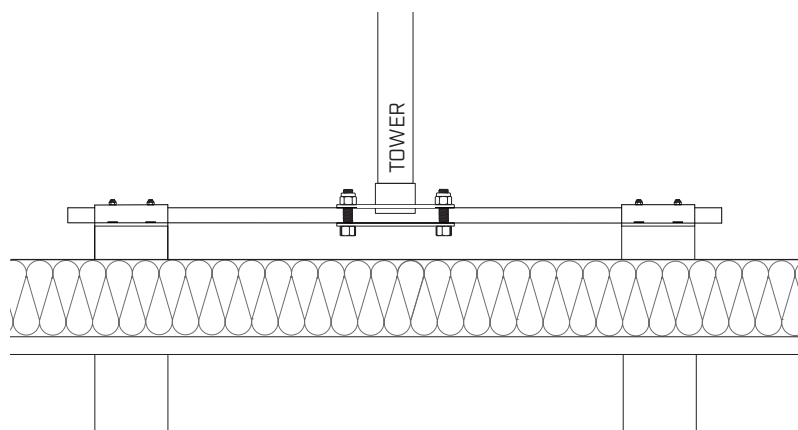


EN
795:2012
A+C

CEN/TS
16415:2013



SURFACE INCLINATION

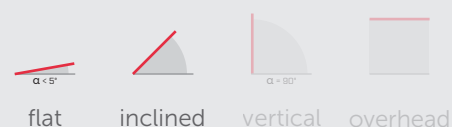

FIELD OF USE

- Min. timber structure: 100 x 100 mm