

SUPPORT FOR ANCHOR LINE ON CORRUGATED SHEET METAL ROOFS

ADJUSTABLE


Used on all roofs in corrugated sheet with centre distance between frets of up to 420 mm.

UNOBTRUSIVE

The device ensures a reduced visual impact thanks to its small size.

PACKAGING


Supplied complete with mounting rivets and cellular rubber seals for perfect waterproofing.

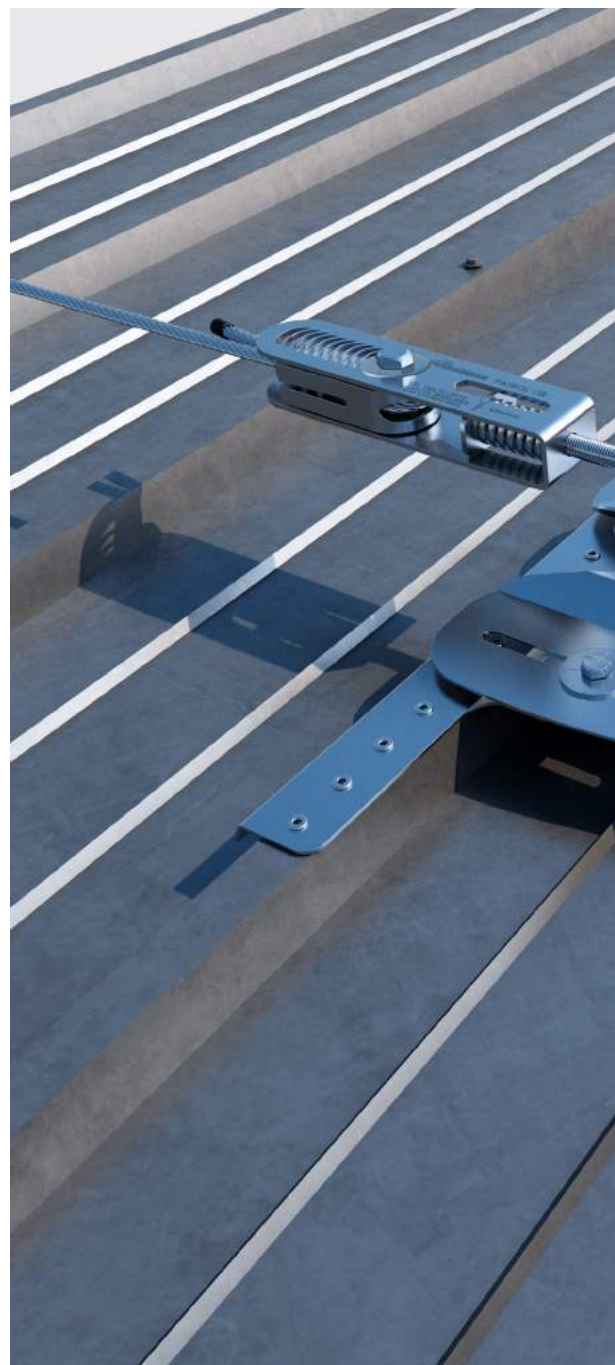

CODES AND DIMENSIONS

CODE	material	i [mm]	L [mm]	pcs.
SHIELD	stainless steel 1.4301 - AISI304	180 - 420	476	1
SHIELD2	stainless steel 1.4301 - AISI304	200 - 400	420	1

Fasteners are included in the package

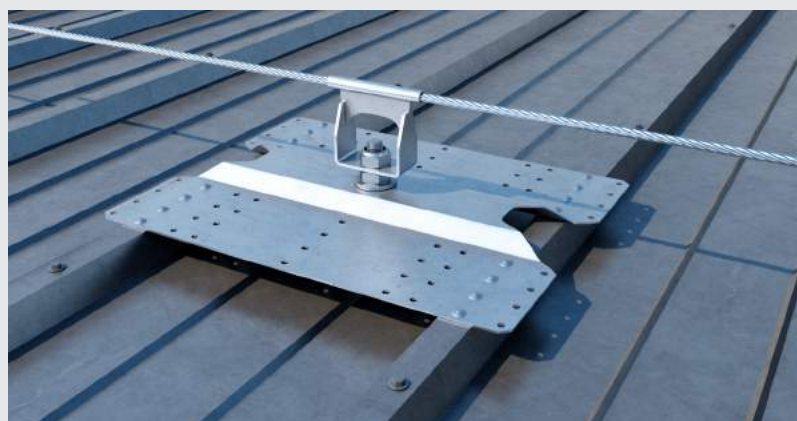


< VERSATILE

Possibility of setting up rectilinear and angular anchor lines with the aid of suitable accessories, according to the needs.

INSTALLATION >

Consists of two main elements: the wings used to fasten to the roof and the base plate, on which the PATROL anchor line components are installed. This guarantees simple and fast installation.

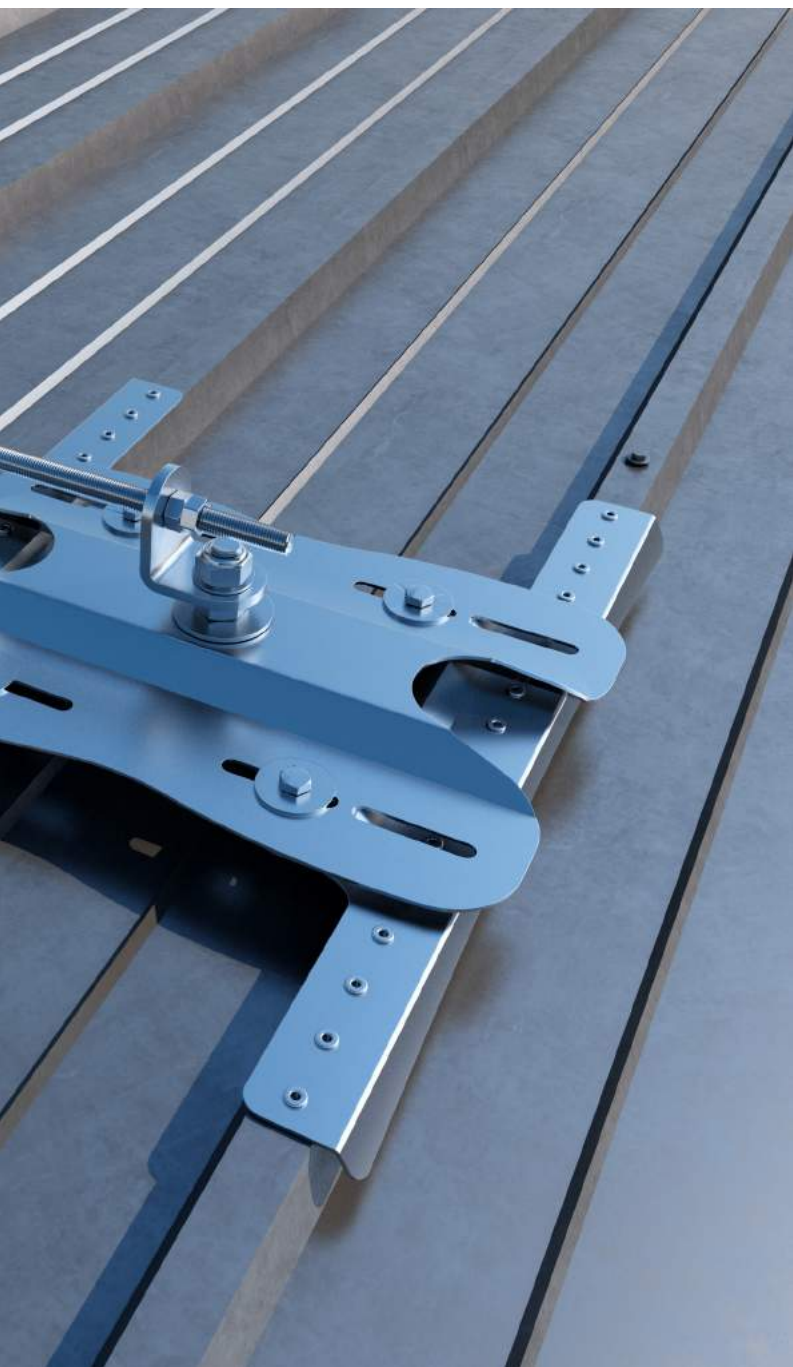


SHIELD



SHIELD2



SURFACE INCLINATION

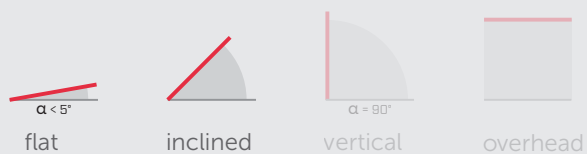


FIELD OF USE


- Corrugated sandwich panel / corrugated sheet metal
 - min. steel: 0,5 mm
 - min. aluminium: 1 mm

GEOMETRY

SHIELD

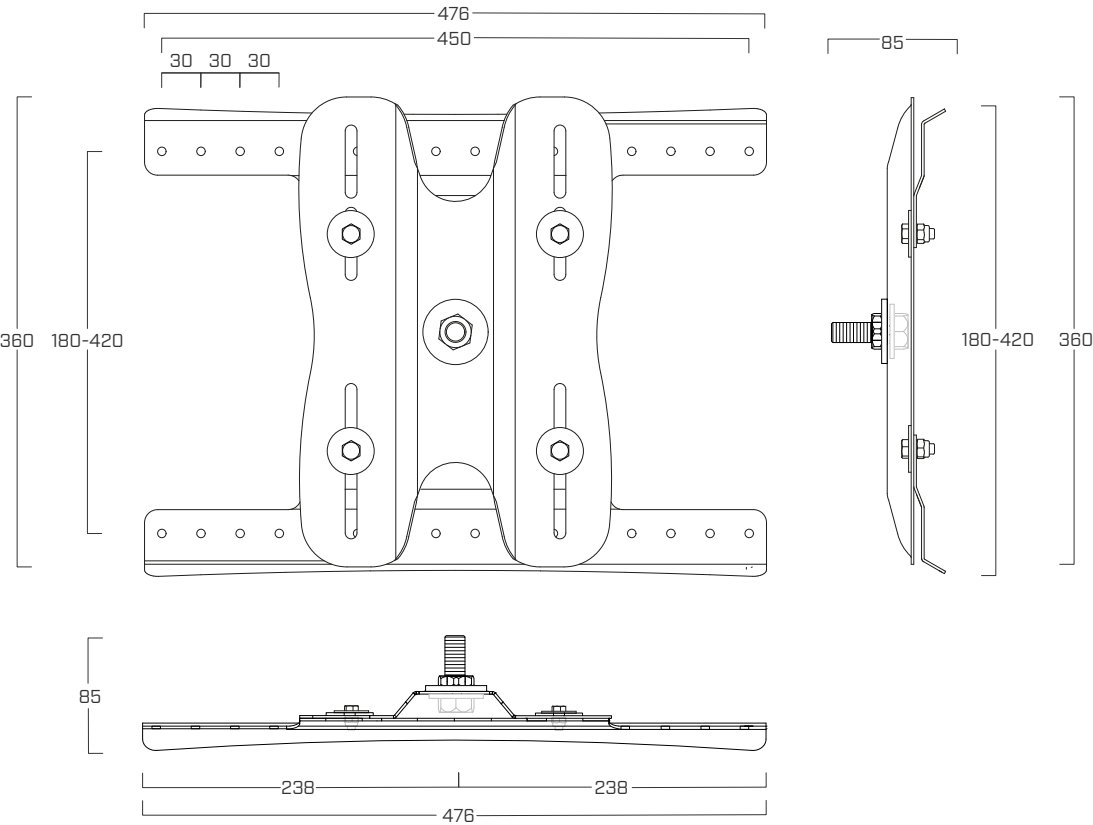


SHIELD2

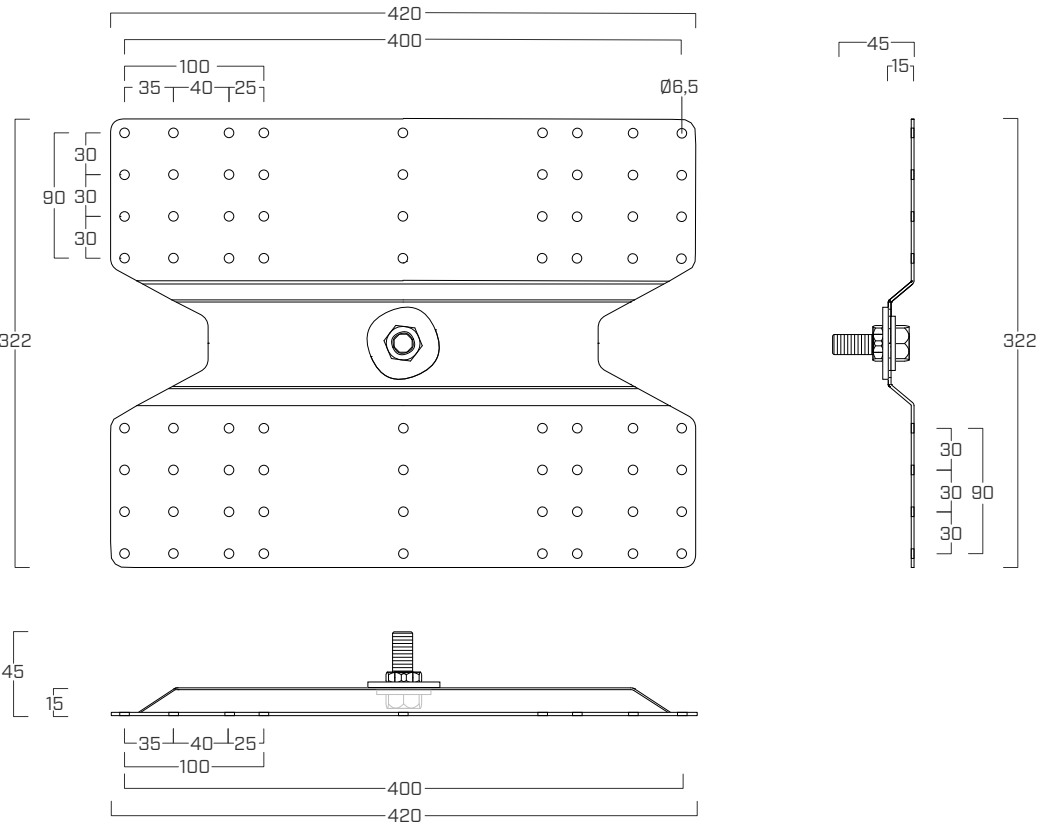


APPLICATION INSTRUCTIONS


SHIELD

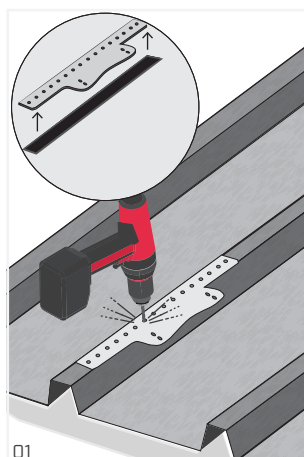


01

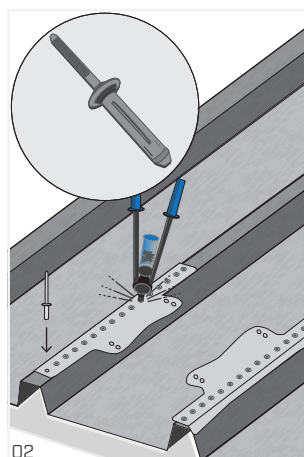

02

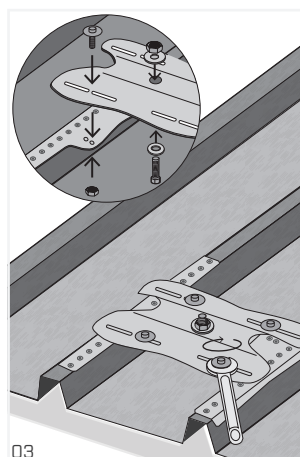


03

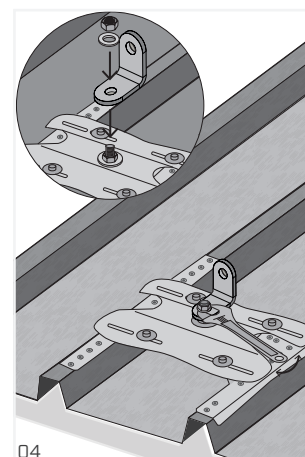


04


SHIELD2

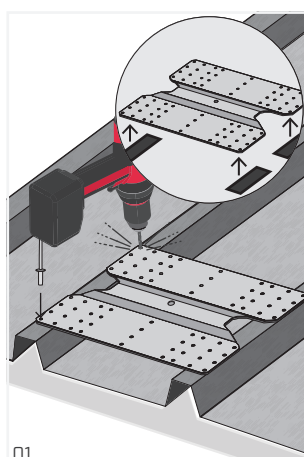


01

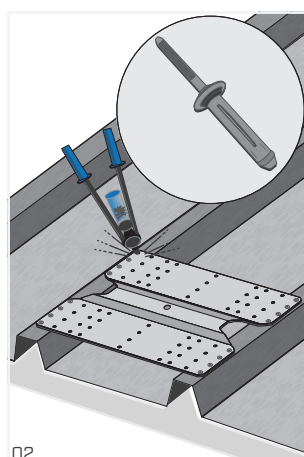

02

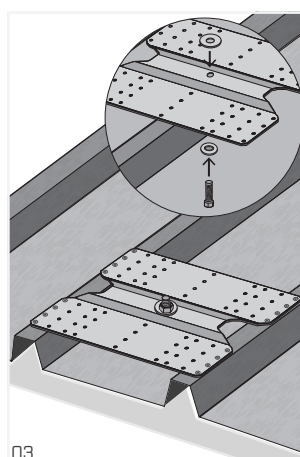


03

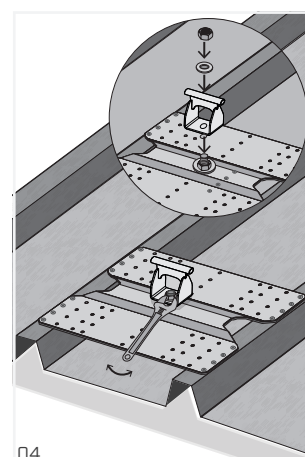

04

For more information about product installation, please see the corresponding manual.

TECHNICAL DATA

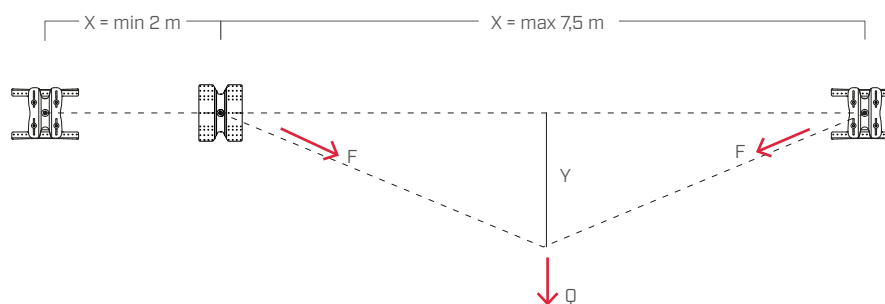

	L _{of span} X [m]	
	2	7,5
Strain Y [m]	0,62	1,44

LABORATORY STRENGTHS

Data	Standard	Value
Q_s	EN 795:2012 CEN/TS 16415:2013	13 kN
Q_{d1}	EN 795:2012 CEN/TS 16415:2013	12 kN

