

ANCHOR POINT

EFFICIENT

The system is secured to one edge of the sheet metal only.

UNOBTRUSIVE

Fastened to the crimp with four clamps, without the need to make openings in the sheet metal.

COMPLETE

The eyelet is included in the package.

EFFECTIVE

The anchoring point can support two workers, due to the strength of just the fastening claps.



UNI
11578

EN
795/A:2012

CENT/TS
16415:2013




CODES AND DIMENSIONS

CODE	material	L [mm]	B [mm]	pcs.
SIANK	stainless steel 1.4301 - AISI304	400	163	1


Eyelet included in the package.

SURFACE INCLINATION

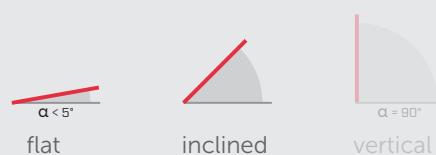


FIELD OF USE


- Sheet metal with double crimp
 - min. steel: 0,4 mm
 - min. aluminium: 0,5 mm
 - min. copper: 0,5 mm
 - min. zinc - titanium: 0,7 mm

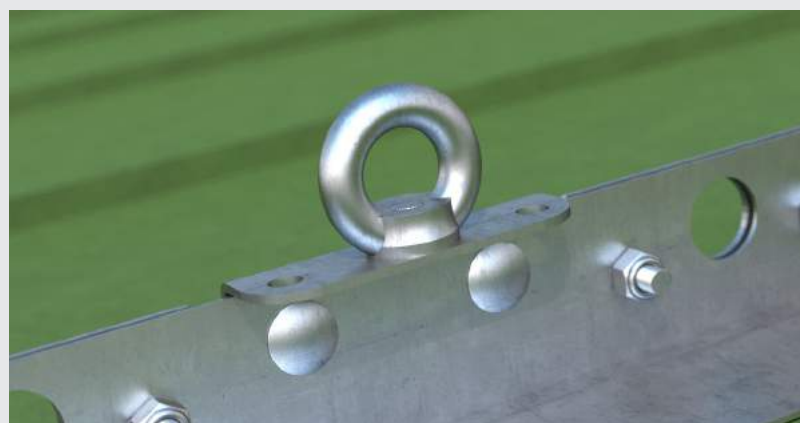

■ GEOMETRY

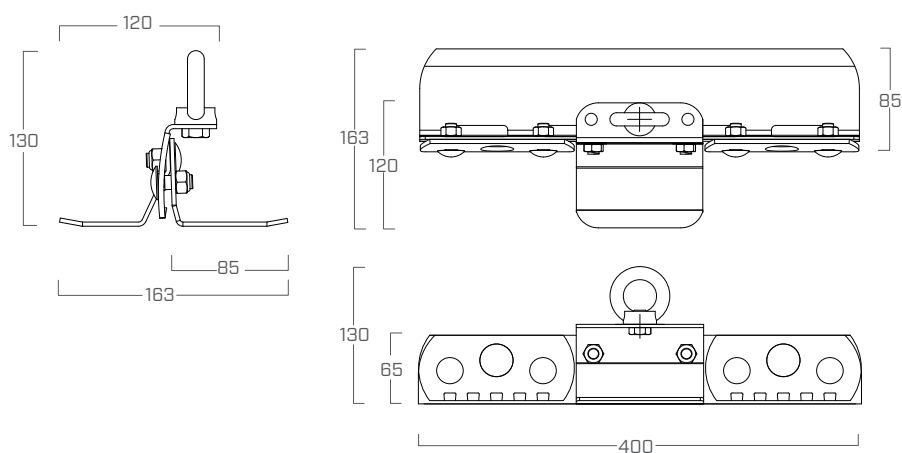

■ APPLICATION INSTRUCTIONS

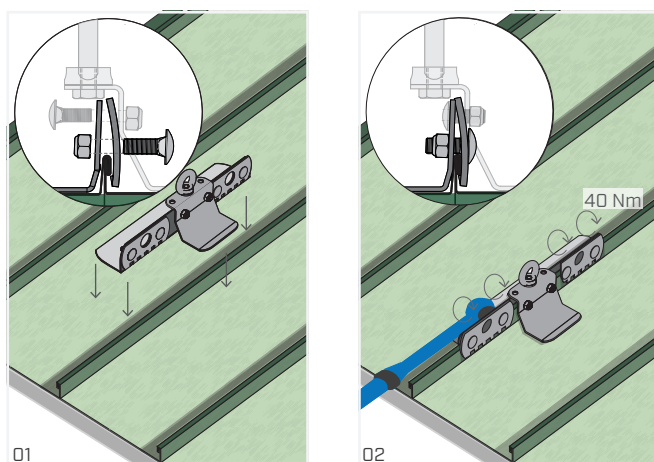

For more information about product installation, please see the corresponding manual.

■ TECHNICAL DATA

LABORATORY STRENGTHS

Data	Standard	Value
Q_s	EN 795:2012 - CEN/TS 16415:2013	13 kN
Q_{d2}	EN 795:2012 - CEN/TS 16415:2013	12 kN

