

SUPPORT FOR ANCHOR LINE ON ROOFS WITH FAUX TILES

FAST INSTALLATION

Easy and quick installation, thanks to the shape obtained with a single plate.

PACKAGING


The package includes fasteners and cellular rubber seals, to ensure waterproofing.



CODES AND DIMENSIONS

CODE	material	i [mm]	L [mm]	pcs.
COPPO	stainless steel 1.4301 - AISI304	330 - 400	420	1

Fasteners are included in the package


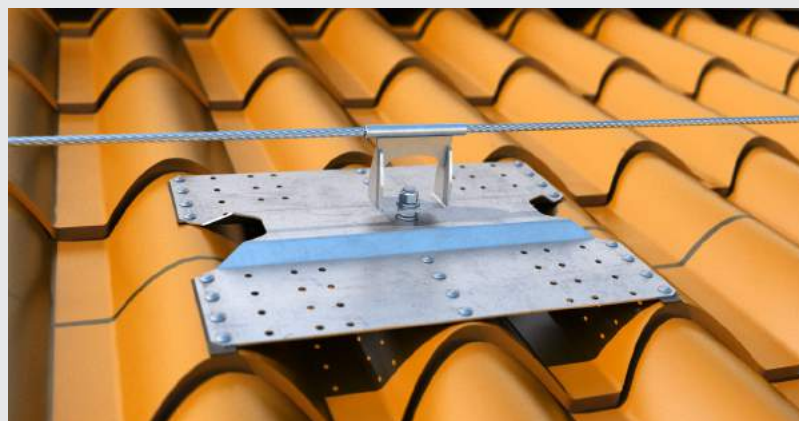


< UNIVERSAL

Compatible with accessories from the pass-through and non-pass-through anchor lines.

ADJUSTABLE >

The various distances between the holes for fastening provides excellent flexibility in installation.

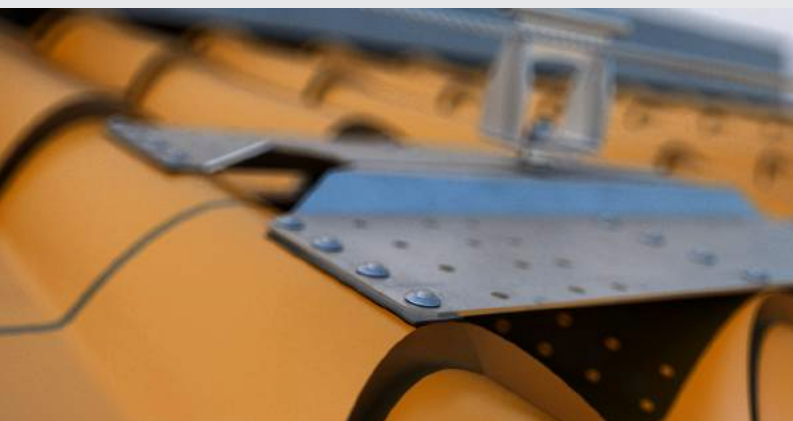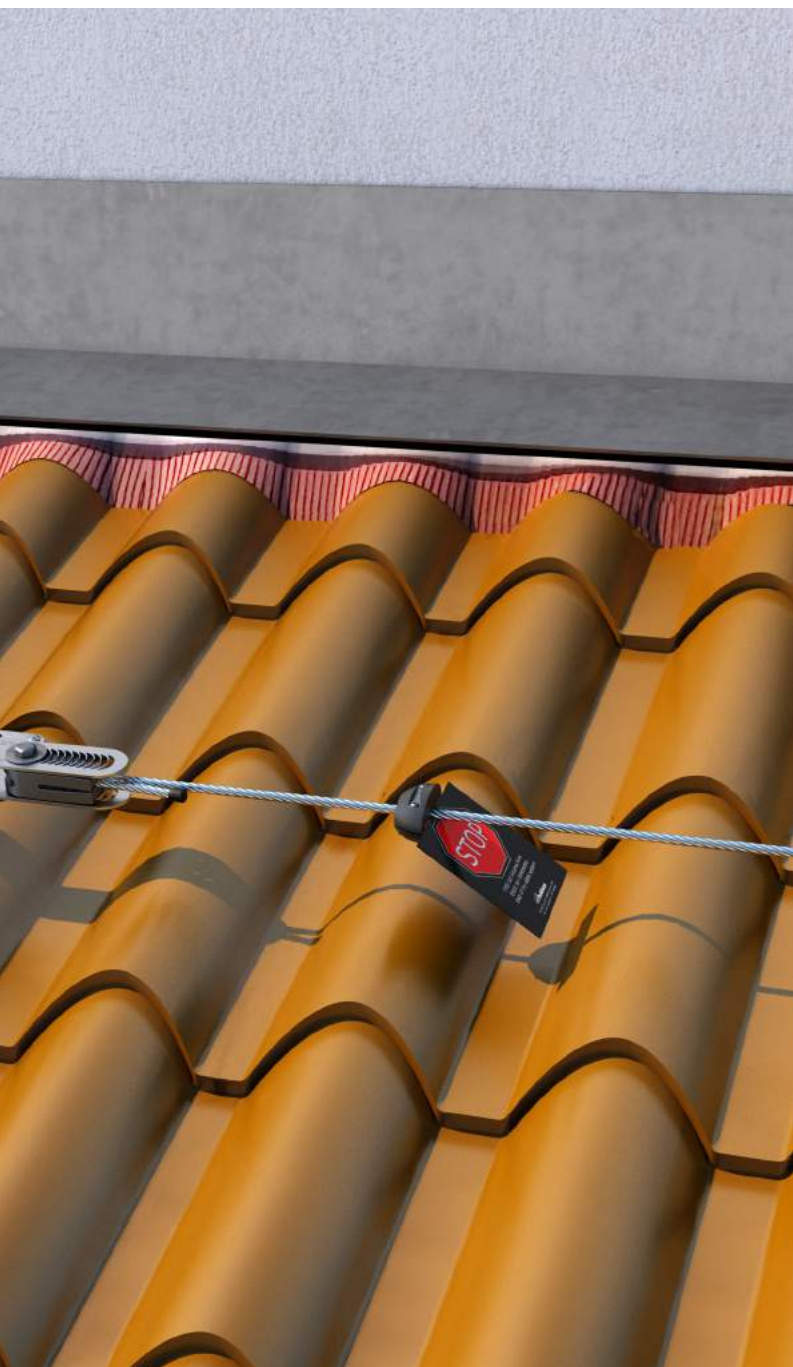

SURFACE INCLINATION



flat



inclined



vertical




overhead

FIELD OF USE


- Waved sandwich panel
 - min. steel: 0,5 mm
 - min. aluminium: 0,7 mm




APPLICATION INSTRUCTIONS

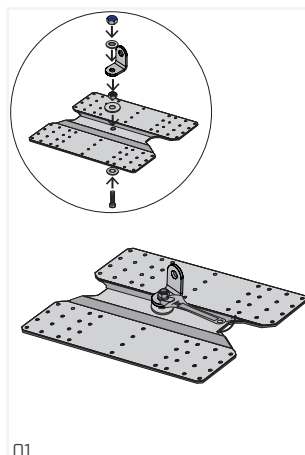

01

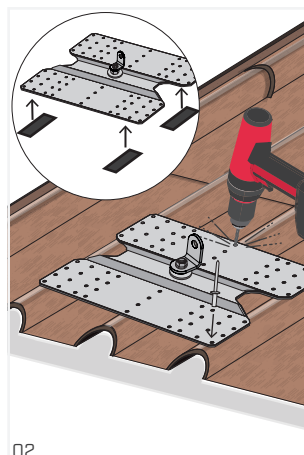


02

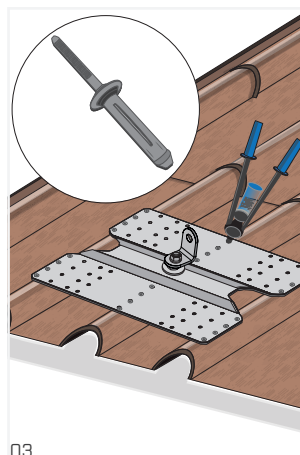

03

For more information about product installation, please see the corresponding manual.

TECHNICAL DATA

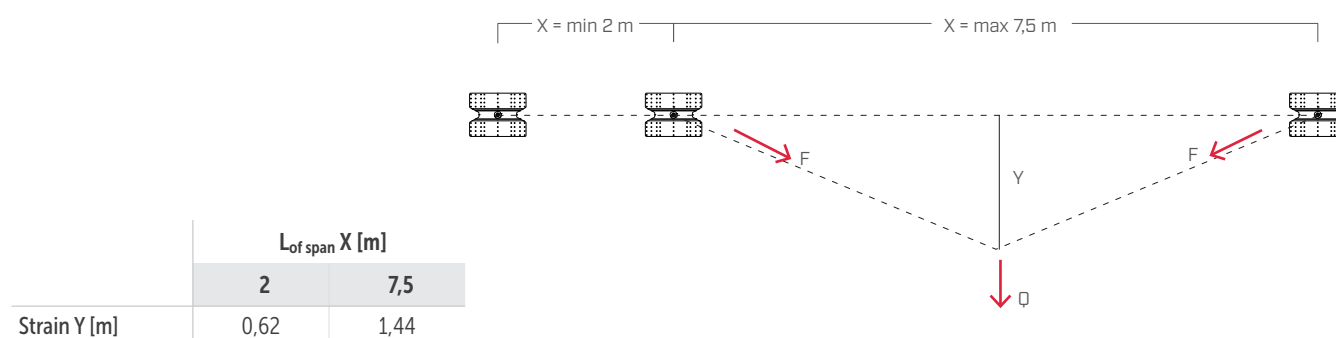

LABORATORY STRENGTHS

Data	Standard	Value
Q _s	EN 795:2012 CEN/TS 16415:2013	13 kN
Q _{d1}	EN 795:2012 CEN/TS 16415:2013	12 kN

