

SIANK FOUR


SUPPORT FOR AOS01 ON SHEET METAL ROOFS WITH DOUBLE CRIMPS

ROBUST

Secured on two ends for improved resistance.

PERFORMING

Up to four workers can be attached.

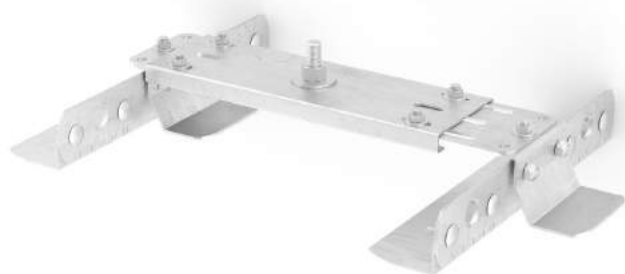

CODES AND DIMENSIONS

CODE	material	opening [mm]	pcs.
SIANK4	stainless steel 1.4301 - AISI304	430 - 600	1

AOS01 anchor point not included in the package, can be ordered separately.


COMPLEMENTARY PRODUCTS

ACCESSORIES

CODE	description	p.
AOS01	swivel eyelet	98

TECHNICAL DATA

LABORATORY STRENGTHS

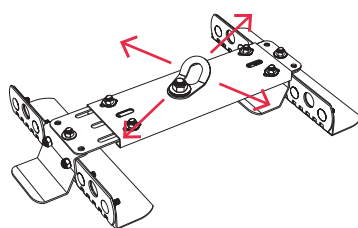


Data	Standard	Value
Q_s	EN 795:2012 - CEN/TS 16415:2013	15 kN
Q_{d2}	EN 795:2012 - CEN/TS 16415:2013	12 kN




UNI
11578

EN
795/A:2012

CEN/TS
16415:2013

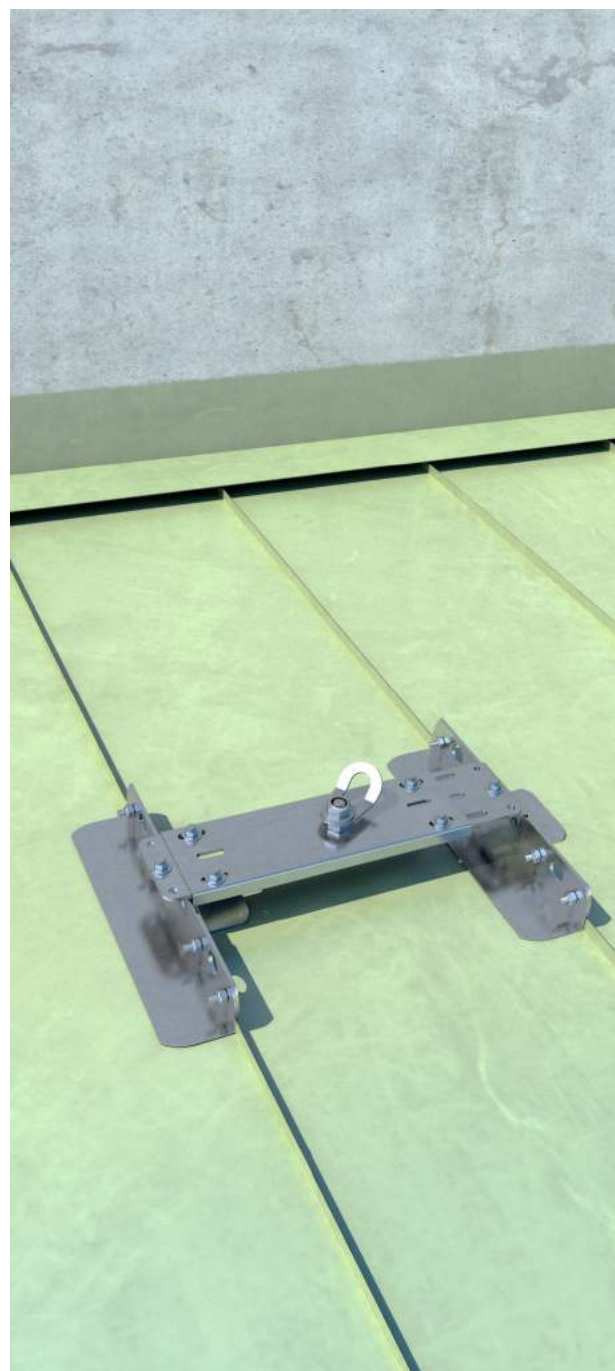

SURFACE INCLINATION

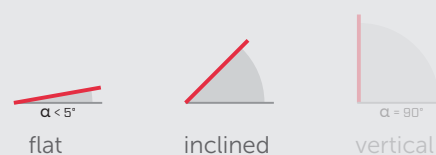

FIELD OF USE

- Sheet metal with double crimp
 - min. steel: 0,5 mm
 - min. aluminium: 0,7 mm
 - min. copper: 0,5 mm
 - min. zinc - titanium: 0,65 mm