

ANCHOR POINT

PRACTICAL

Thanks to its lightweight and compact size, this anchor can be installed quickly and easily.

SAFE


Laser cut from a single piece with no welding points, it improves safety in all its applications.

VERSATILE

Ideal as an anchor point in multiple environments, it allows the operator to safely access.

UNIVERSAL

Flexible in its applications, it can be installed on timber, concrete and steel structures.

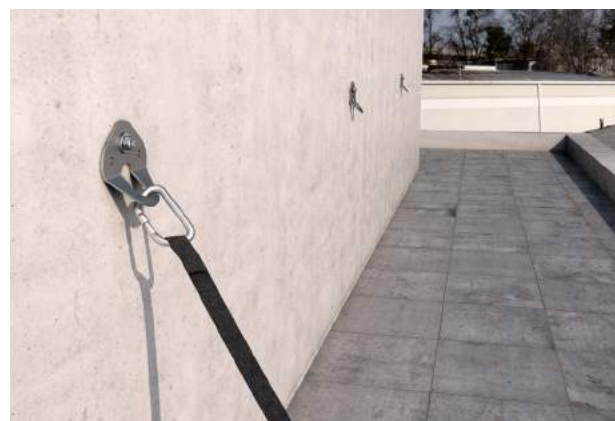

CODES AND DIMENSIONS

CODE	material	B [mm]	L [mm]	pcs.
KITE	stainless steel 1.4016 - AISI430	101	100	1


COMPLEMENTARY PRODUCTS

FASTENING

n.	TYPE	description	d ₁ [mm]	p _{min} [mm]	p.
2	HBS	screw for timber	8	100	180
1	VGS	screw for timber	11	100	184
1	BEF	KITE fastening kit	8 / 11	100	215

n.	TYPE	description	Ø [mm]	p _{min} [mm]	p.
1	AB1	heavy anchor	M12	90	200
1	MGS	threaded rod	M12	-	191
	VIN-FIX PRO	vinylester chemical anchor	-	-	206
1	BOLT	bolt	M12	-	-


SURFACE INCLINATION

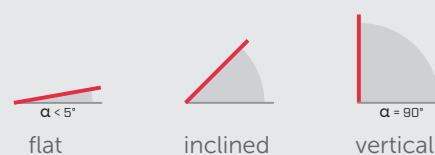

FIELD OF USE


- Min. timber structure: 100 x 100 mm
- Min. concrete structure: 140 mm
- Min. steel structure: 5 mm

GEOMETRY



1 hole Ø13 mm for fastening on concrete and steel
2 holes Ø9 mm + 1 hole Ø13 mm for fastening on timber

APPLICATION INSTRUCTIONS

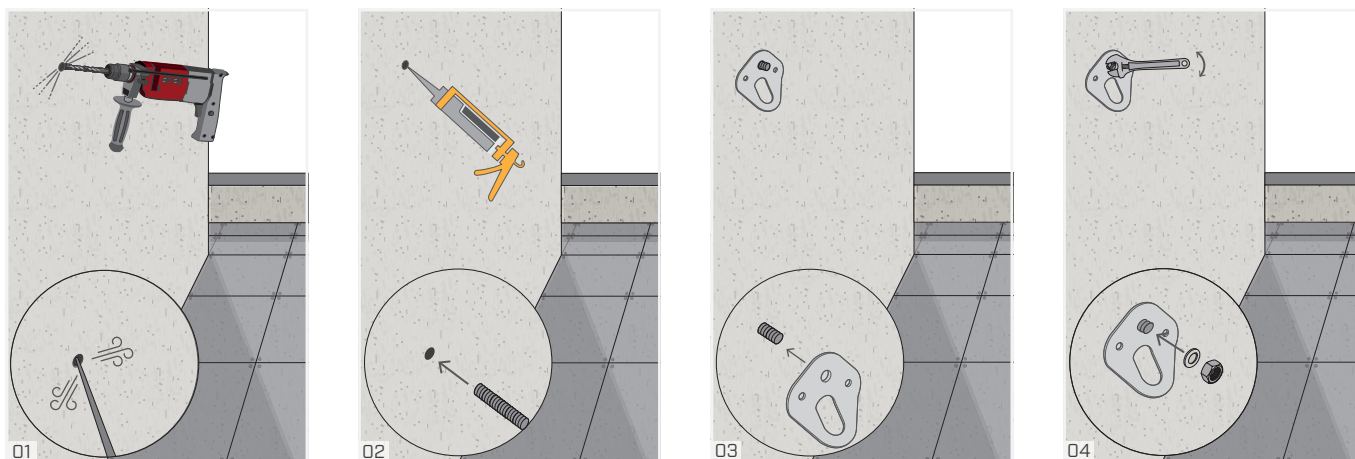

For more information about product installation, please see the corresponding manual.

TECHNICAL DATA

LABORATORY STRENGTHS

Data	Standard	Value
Q_s	EN 795:2012	12 kN
Q_{d2}	EN 795:2012	9 kN

