

ANCHOR POINT

FUNCTIONAL

The 360° swivel eyelet allows the operator total freedom of movement.

COMPLETE

Supplied in a handy kit complete with bolts and washers for installation.

UNIVERSAL

The threaded rod available in various lengths allows the anchor to adapt to any type of timber, concrete and steel structure.

VERSATILE

Ideal as an anchor point in multiple environments, it allows the operator to safely access roofs and terraces.



CODES AND DIMENSIONS

CODE	material	H [mm]	H ₁ [mm]	pcs.
AOS50	stainless steel 1.4301 - AISI304	80	29	1
AOS130	stainless steel 1.4301 - AISI304	175	135	1
AOS200	stainless steel 1.4301 - AISI304	250	166	1
AOS300	stainless steel 1.4301 - AISI304	350	266	1
AOS400	stainless steel 1.4301 - AISI304	450	366	1
AOS500	stainless steel 1.4301 - AISI304	550	466	1

COMPLEMENTARY PRODUCTS


FASTENING

TYPE	description	Ø [mm]	p.
VIN-FIX PRO	vinylester chemical anchor	M16	206

ACCESSORIES

CODE	description	p.
PALMIFIX	fixed counterplate	124
OMEGA	accessory for PALMIFIX	124

SURFACE INCLINATION

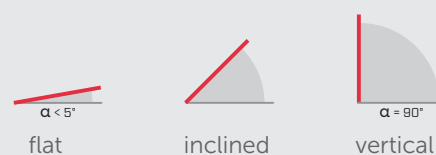


FIELD OF USE

- Min. timber structure: 100 x 120 mm
- Min. concrete structure: 164 mm
- Min. steel structure: 5 mm

GEOMETRY


ANCHOR EYELET

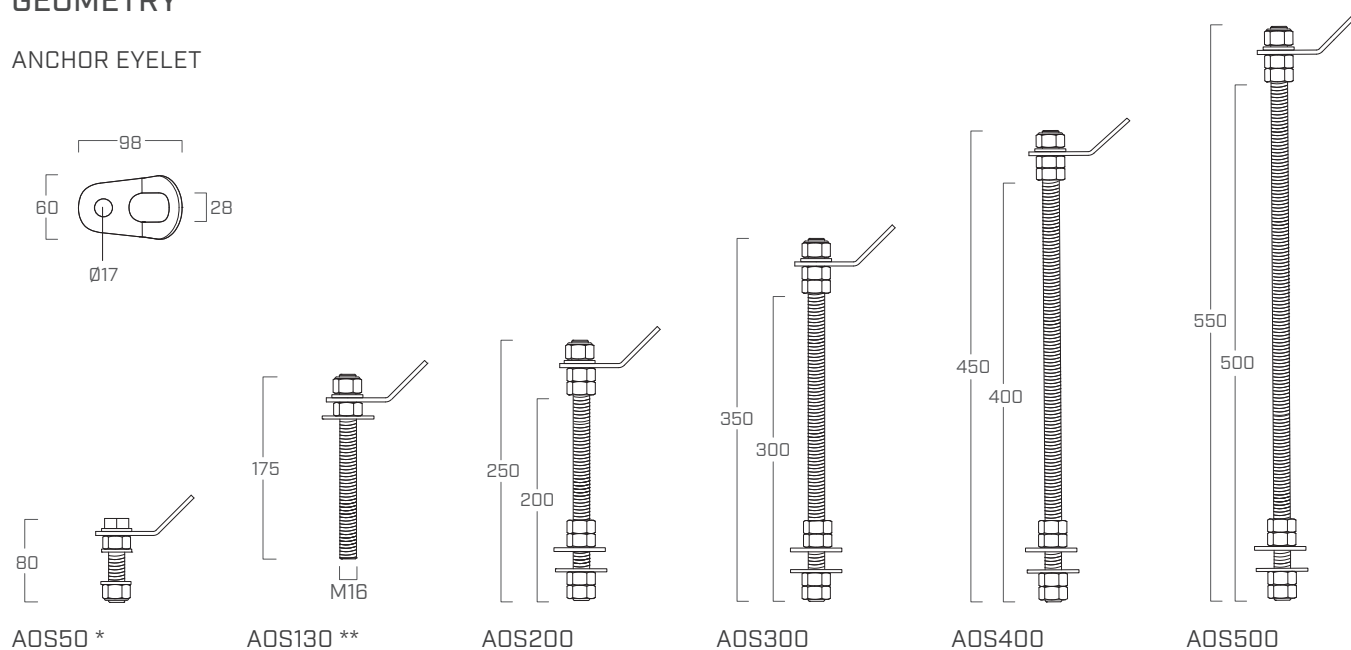

* recommended for use on steel

** recommended for use on concrete, combined with a chemical anchor

APPLICATION INSTRUCTIONS

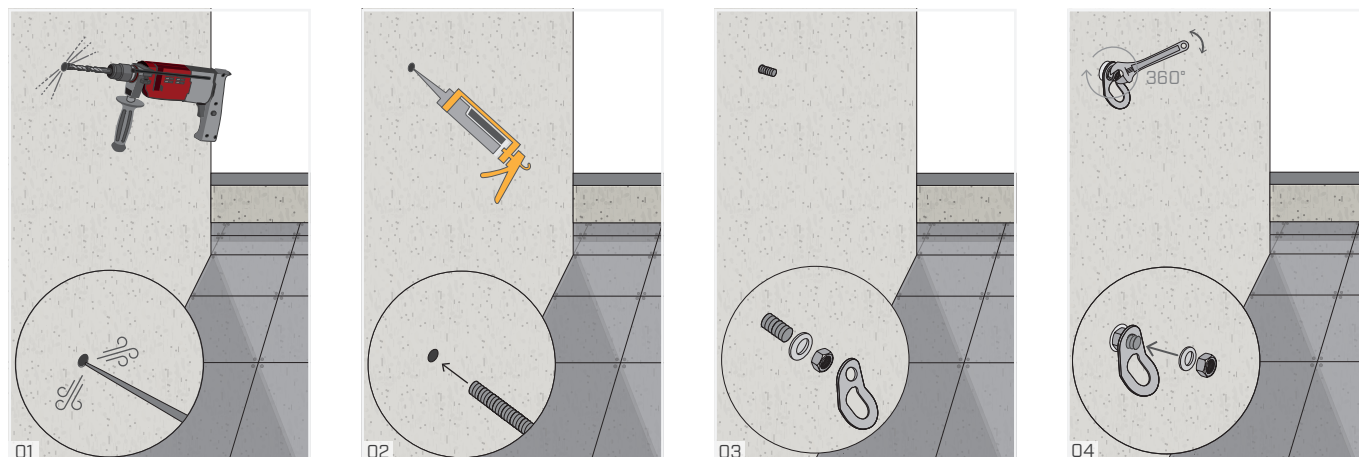

For more information about product installation, please see the corresponding manual.

TECHNICAL DATA

LABORATORY STRENGTHS

Data	Standard	Value
Q_s	EN 795:2012	14 kN
Q_{d1}	EN 795:2012	12 kN

