


GUIDED TYPE FALL ARRESTER ON ANCHOR LINE

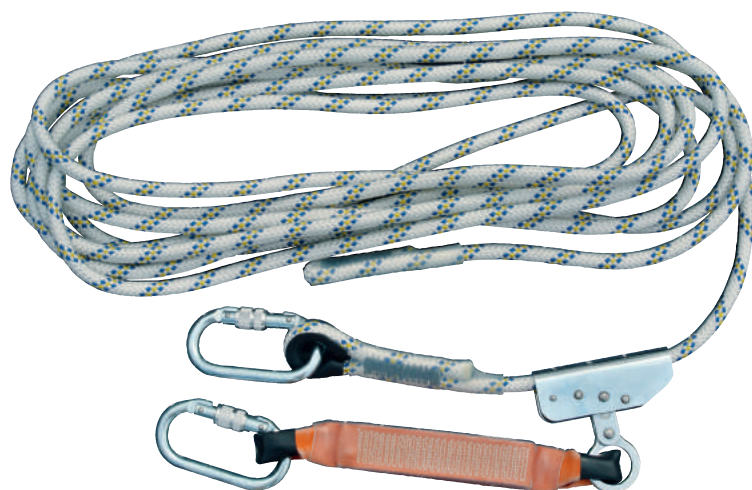

- Material: **polyamide**
- Rope: **Ø12 mm**
- Guided and sliding-type fall arrester, with fixed installation on the rope
- Two steel carabiners with screw ring nut

Fall arrester with chromed steel locking device and integrated energy absorber.

In the case of a fall, the energy absorber reduces the force of impact down to a maximum of 6 kN.

CODES AND DIMENSIONS

CODE	rope [mm]	L [m]	weight [g]	pcs.
LINO10	Ø12	10	2000	1
LINO15	Ø12	15	2500	1
LINO20	Ø12	20	3000	1

TECHNICAL DATA

1. Cable thimble knot on the work rope
2. Seam
3. Polyamide work rope, Ø12 mm
4. Energy absorber element (micro-absorber)
5. Marking
6. Micro-absorber carabiner
7. Terminal knot on work rope

