


ROPE 3

SEMI-STATIC ROPE

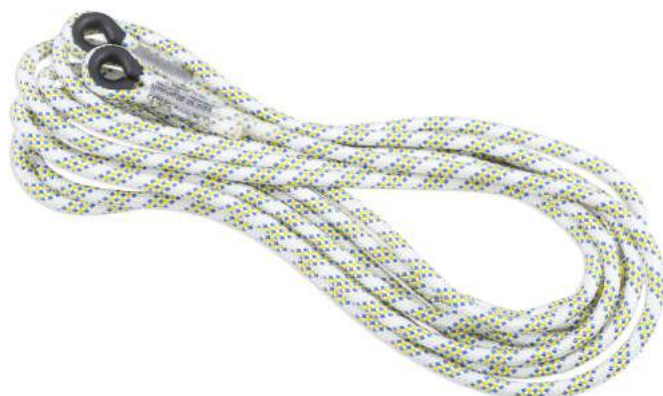

- Material: **polyamide**
- To be used in combination with the guided type **BACK2** fall arrester (**EN 353-2**) (p. 294)

Semi-static loge with two openings for positioning and anchoring.

CODES AND DIMENSIONS

CODE	rope [mm]	L [m]	pcs.
ROPE320	Ø14	20	1
ROPE330	Ø14	30	1
ROPE350	Ø14	50	1

ROPE 4

STATIC ROPE



EN 1891/A



CODES AND DIMENSIONS

CODE	rope [mm]	L [m]	weight [g/m]	colour	pcs.
ROPE460R	Ø10.5	60	75	●	1
ROPE4100R	Ø10.5	100	75	●	1
ROPE4200R	Ø10.5	200	75	●	1
ROPE460Y	Ø10.5	60	75	●	1
ROPE4100Y	Ø10.5	100	75	●	1
ROPE4200Y	Ø10.5	200	75	●	1

- The **sandwich structure and special silk fibres** guarantee the safety of the worker even in the case of damage
- Can also be used to lift and suspend loads

