

MOBILE ANCHOR POINT

REMOVABLE


It can be assembled and disassembled easily and quickly, to safely ensure temporary access to the roofing.

ADJUSTABLE

Allows you to choose a temporary installation point in complete freedom.

FUNCTIONAL

It can be temporarily installed on doors, windows and inclined skylights, with no structural damage.

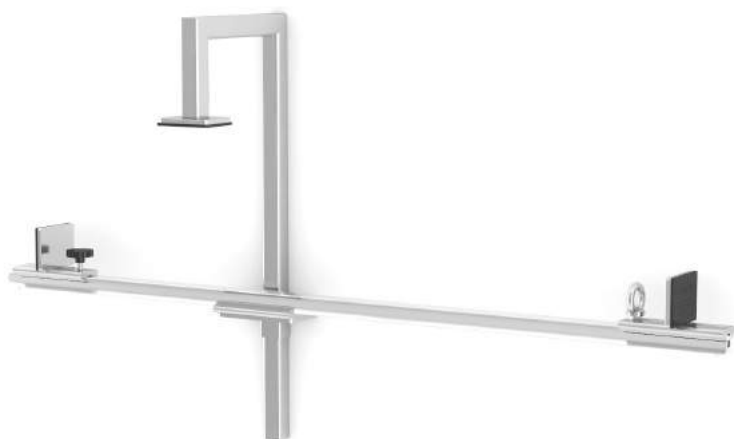


EN
795 - B



CODES AND DIMENSIONS

CODE	material	L [mm]	B [mm]	H [mm]	kg	pcs.
MOBILE	EE30 aluminium	1450	122	100	3,2	1

TECHNICAL DATA

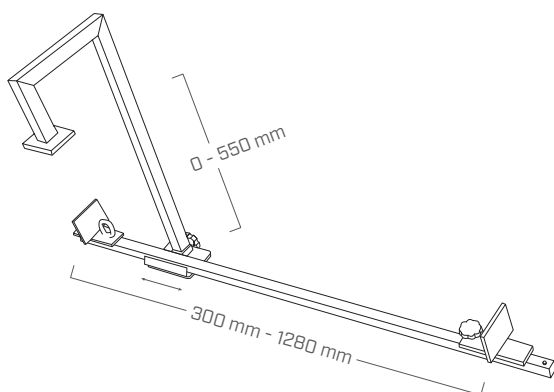

SURFACE INCLINATION



FIELD OF USE

- Roof windows and skylights
- Doors