

HORIZONTAL NET

HORIZONTAL POLYPROPYLENE FALL PROTECTION SAFETY NET

SAFE


It requires a limited number of fastening systems (maximum distance between anchors: 2,5 m).

MODULAR

Possibility of combining different nets to cover larger areas.

CAN BE PERSONALIZED

Also available in other colours by request (red, blue, white) and in personalised format for larger nets.

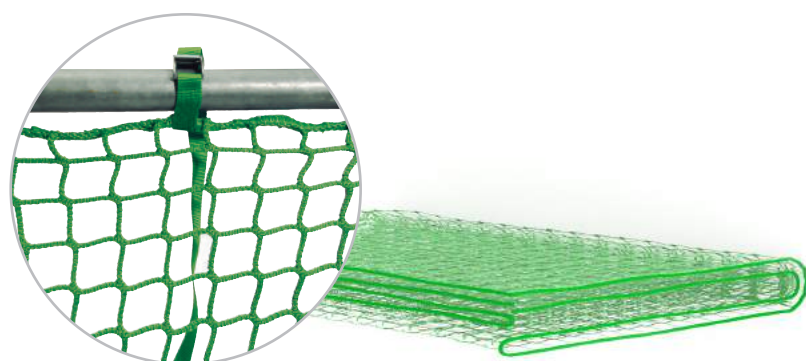

NETHOOK1



NETHOOK2

CODES AND DIMENSIONS

CODE	B [m]	L [m]	mesh [mm]	rope [mm]	weight [kg]	pcs.
HOR510	5	10	100	Ø5	11,4	1
HOR610	6	10	100	Ø5	13,7	1
HOR1010	10	10	100	Ø5	22,9	1
HOR7515	7,5	15	100	Ø5	25,7	1

Each fastening point must withstand a minimum load of 6 kN

COMPLEMENTARY PRODUCTS


FASTENING

CODE	description	rope [mm]
HORFIX	fastening rope	Ø14
HORCONNECT	sewing rope	Ø6


It can be ordered by the metre

FASTENING

CODE	description
NETHOOK1	U net hook
NETHOOK2	turned net hook

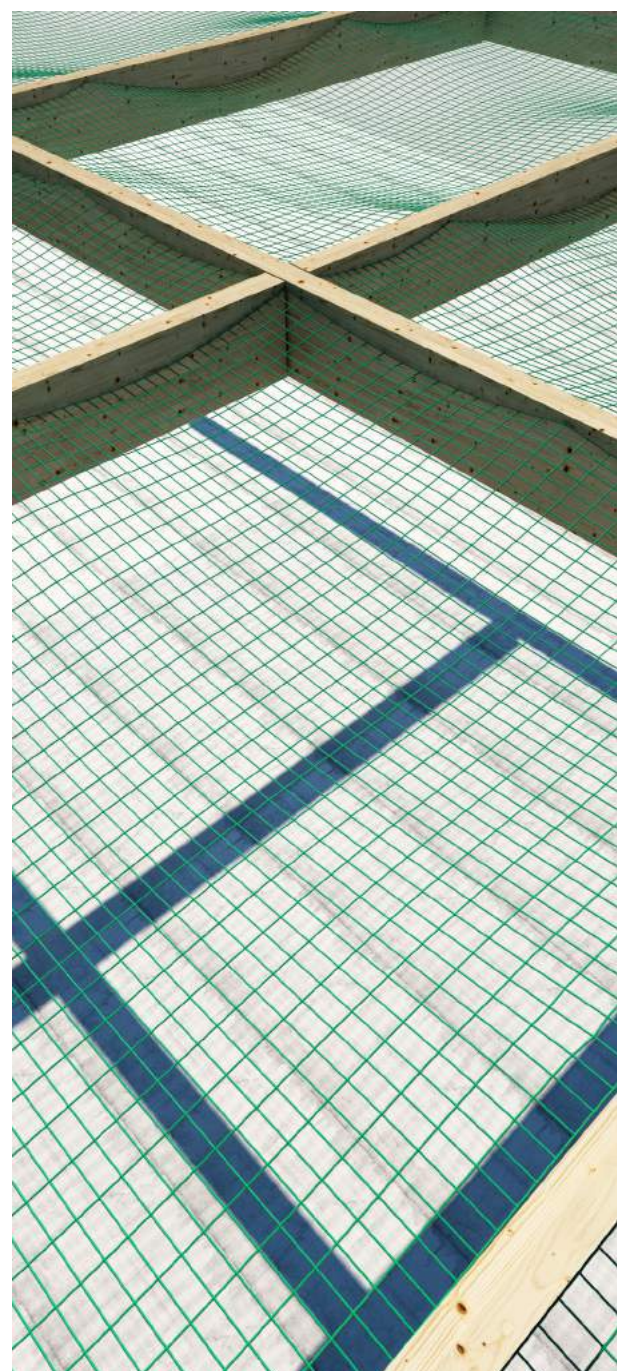

SURFACE INCLINATION

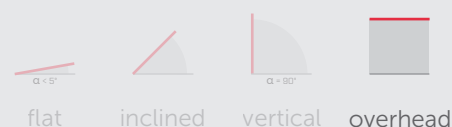

MATERIAL

Knotless high resistance polypropylene net