



Product Service

EC-Type Examination Certificate

No. P5 15 07 78362 013

Holder of Certificate: Rotho Blaas SrlVia dell'Adige 2/1
39040 Cortaccia
ITALY**Product:** PPE against fall from a height
Anchor Devices EN 795 A+C and CEN/TS 16415**Model(s):** SHIELD**Parameters:**

Construction:

- stainless steel 1.4301 AISI 304 anchor device; exist of 1 pc. base plate (l x w: 239mm x 360mm; 2mm thick) and 2 pc. side plates (l x w: 476,5mm x 107mm; 2mm thick), which are screwed together over 4 pc. M8x16 stainless steel screws with washer and nut; in the mid of SHIELD a ø 17mm hole exist to fix a M16x50 stainless steel screw (as fixation point for AOS01 or PATROL); total SHIELD width is adjustable between 180mm and 420mm;

Fixation element:

- for EN 795/A use with component AOS01;
- for EN 795/C use with components of system PATROL; all parts are defined in drawings and part lists;

More Parameters:

see Annex

This EC-Type Examination Certificate is issued according to Article 10 of Council Directive 89/686/EEC for personal protective equipment as classified in Article 8 (PPE of category 3). It confirms that the listed product fulfills the basic requirements as specified in Annex II of the Directive. This certificate refers only to the sample submitted to TÜV SÜD Product Service GmbH for testing and certification and on its technical documentation. See also notes overleaf.

Test report no.: 713049397-1**Valid until:** 2020-07-21**Date,** 2015-07-29
(Volker Kron)

TÜV SÜD Product Service GmbH is Notified Body according to Council Directive 89/686/EEC for personal protective equipment, notified by publication in the Official Journal of the EC No. C 203/44 dated July 07th, 1994 with identification No. 0123.

Page 1 of 2

Annex to

EC-Type Examination Certificate

No. P5 15 07 78362 013


Anchor Device, type SHIELD:

Fixations: SHIELD is fixed over 32 pc. 6,3 x 20,2 aluminum rivets with EPDM washers on:

- 0,5mm steel trapeze tin roof (EN 795/C)
- 0,4mm steel trapeze tin roof (EN 795/A)
- 1,0mm aluminum trapeze tin roof (EN 795/C)
- 0,6mm aluminum trapeze tin roof (EN 795/A)

Marking: manufacturer; type; EN 795/A+C:2012; CEN/TS 16415:2013; "read instruction"-pictogram; CE-marking; max. 2 persons; serial no.; manufacturing year

Weight: 2,62kg

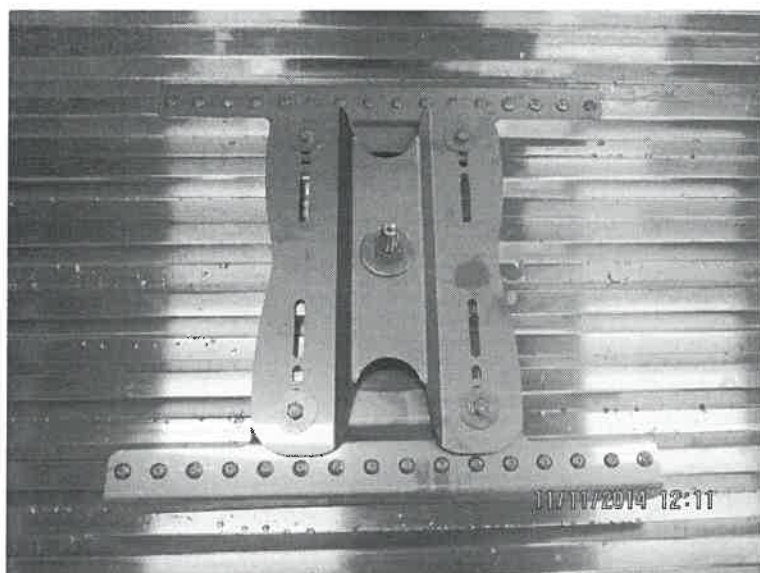

Department: GARTCP / vm
Date: 2015-07-29

Page 2 of 2